

NOTES: UNLESS OTHERWISE SPECIFIED


LTR	DESCRIPTION	DATE	APPROVAL

- P/N: 300COLOR
HOUSING: MOLDED NYLON 6 OR 6.6. AVAILABLE IN TEN COLORS.
CONTACT TIP: STEEL. BRIGHT NICKEL FINISH.

- P/N: 9214COLOR
HOUSING: MOLDED ACETAL. AVAILABLE IN BLACK OR RED.
FRAME: BRASS. NICKEL PLATED.
CONTACT: BeCu OR PHOSPHOR BRONZE. NICKEL PLATED.

- P/N: W-600/COLOR
18AWG 65X36 TINNED COPPER
0.144 [3.66] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.

- PERFORMANCE
MAXIMUM CURRENT: 4.0 AMPS
MAXIMUM VOLTAGE: 5000 W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

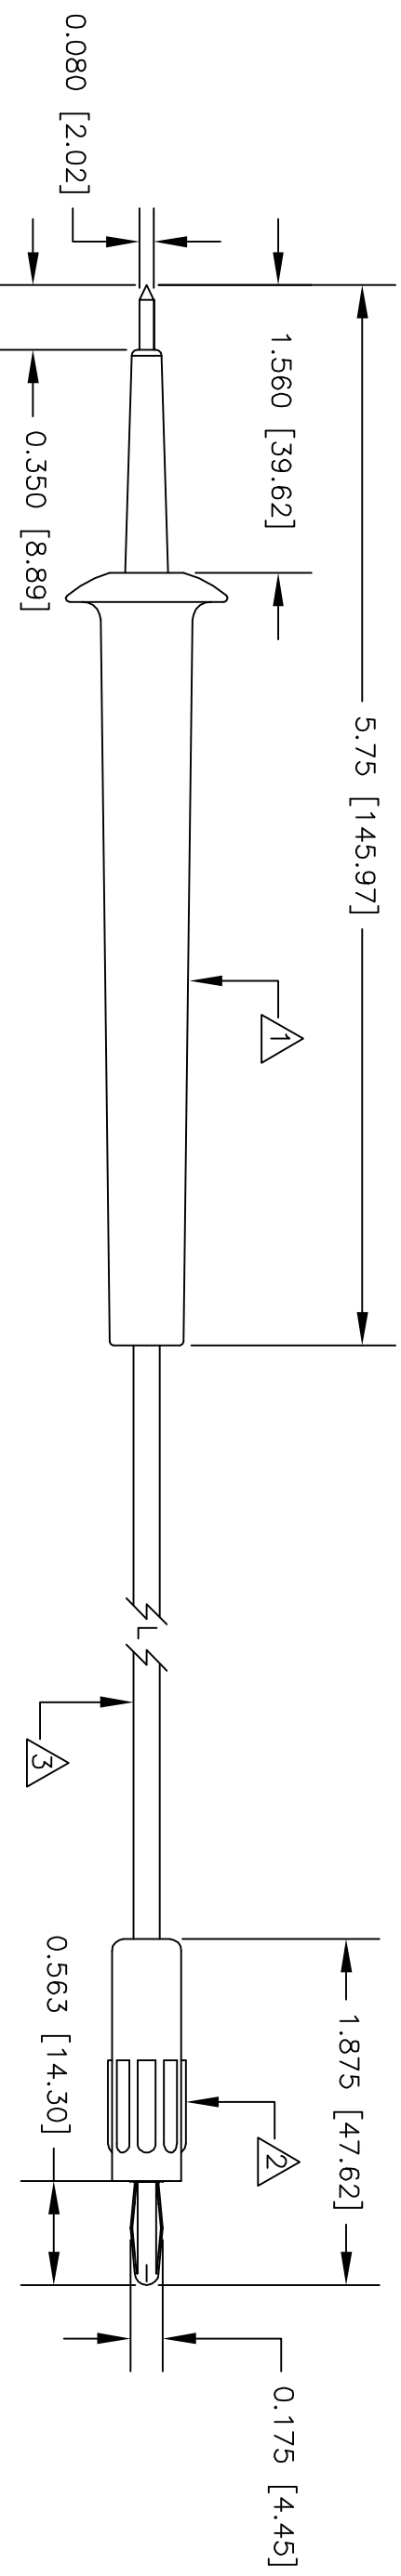

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ARE: FRACTIONS DECIMALS ANGLES .XX # .XXX # #		CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
MATERIAL SEE NOTE.		APPROVALS	DATE		
FINISH SEE NOTE.		R.L.	11/10	DESCRIPTION PROBE (30) TO STD BAN PLUG (9214)	
APPLICATION USED ON		APPROVED BY		SIZE B	CODE IDENT NO. 08505
DO NOT SCALE DRAWING				DRAWING NO. 658	REV
				SCALE 1:1	SHEET 1 OF 1

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.