


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 30CCOLOR
 HOUSING: MOLDED NYLON 6 OR 6.6. AVAILABLE IN TEN COLORS.
 CONTACT TIP: STEEL. BRIGHT NICKEL FINISH.

2. P/N: 9260CCOLOR
 HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.
 FRAME: BRASS. NICKEL PLATED.
 CONTACT: BeCu OR PHOSPHOR BRONZE. NICKEL PLATED.

3. P/N: 9706CCOLOR
 20AWG 42X36 TINNED COPPER
 0.144 [3.66] O.D. PVC INSULATION
 AVAILABLE IN TEN COLORS.

4. PERFORMANCE
 MAXIMUM CURRENT: 3 AMPS
 MAXIMUM VOLTAGE: 5000 W.V.D.C.
 MAXIMUM TEMPERATURE: 221°F (105°C)

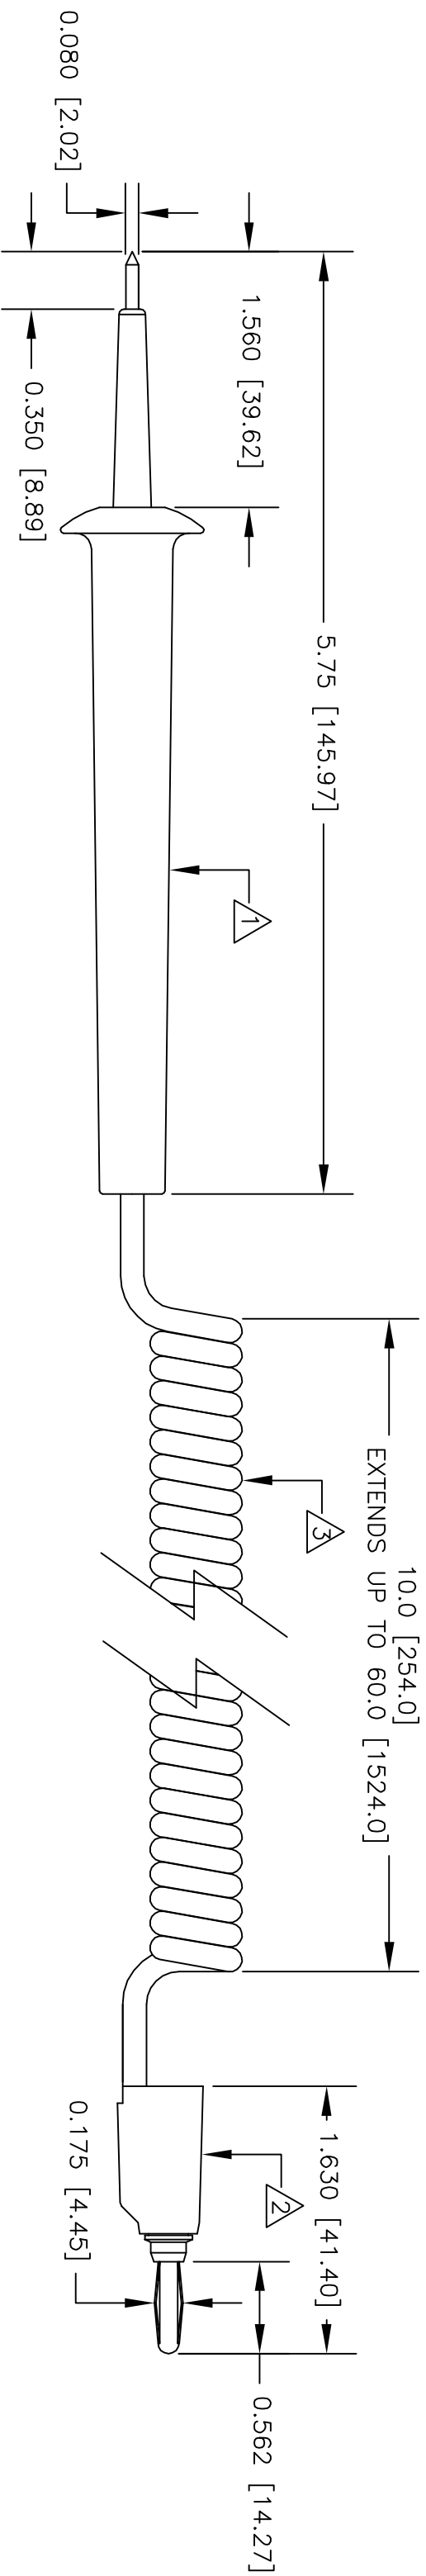

LTR	DESCRIPTION	DATE	APPROVEI

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.	
		# .XX # # .XXX # #		APPROVALS	
		MATERIAL SEE NOTE.		DATE	
		FINISH SEE NOTE.		DRAWN R.L.	
		APPLICATION USED ON		APPROVED BY	
		DO NOT SCALE DRAWING		DATE 9/12	
		NEXT ASSY		DESCRIPTION	
				PROBE (30) TO	
				STK STD BAN PLUG (9260)	
				SIZE CODE IDENT NO. DRAWING NO.	
				B 08505 659C	
				SCALE 1:1	
				SHEET 1 OF 1	
				REV	

E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.