


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 300COLOR  
 HOUSING: MOLDED NYLON 6 OR 6.6. AVAILABLE IN TEN COLORS.  
 CONTACT TIP: STEEL. BRIGHT NICKEL FINISH.

2. P/N: 9302COLOR  
 HOUSING: MOLDED NYLON 6.6. AVAILABLE IN TEN COLORS.  
 FRAME: BRASS. NICKEL PLATED.  
 CONTACT: BeCu OR PHOSPHOR BRONZE. NICKEL PLATED.  
 HARDWARE: STAINLESS STEEL NUT. BRASS EYELET. COPPER, TIN PLATED TERMINAL RING.

3. P/N: W-600/COLOR  
 18AWG 65X36 TINNED COPPER  
 0.144 [3.66] O.D. PVC INSULATION  
 AVAILABLE IN TEN COLORS.

4. PERFORMANCE  
 MAXIMUM CURRENT: 4.0 AMPS  
 MAXIMUM VOLTAGE: 5000 W.V.D.C.  
 MAXIMUM TEMPERATURE: 221°F (105°C)

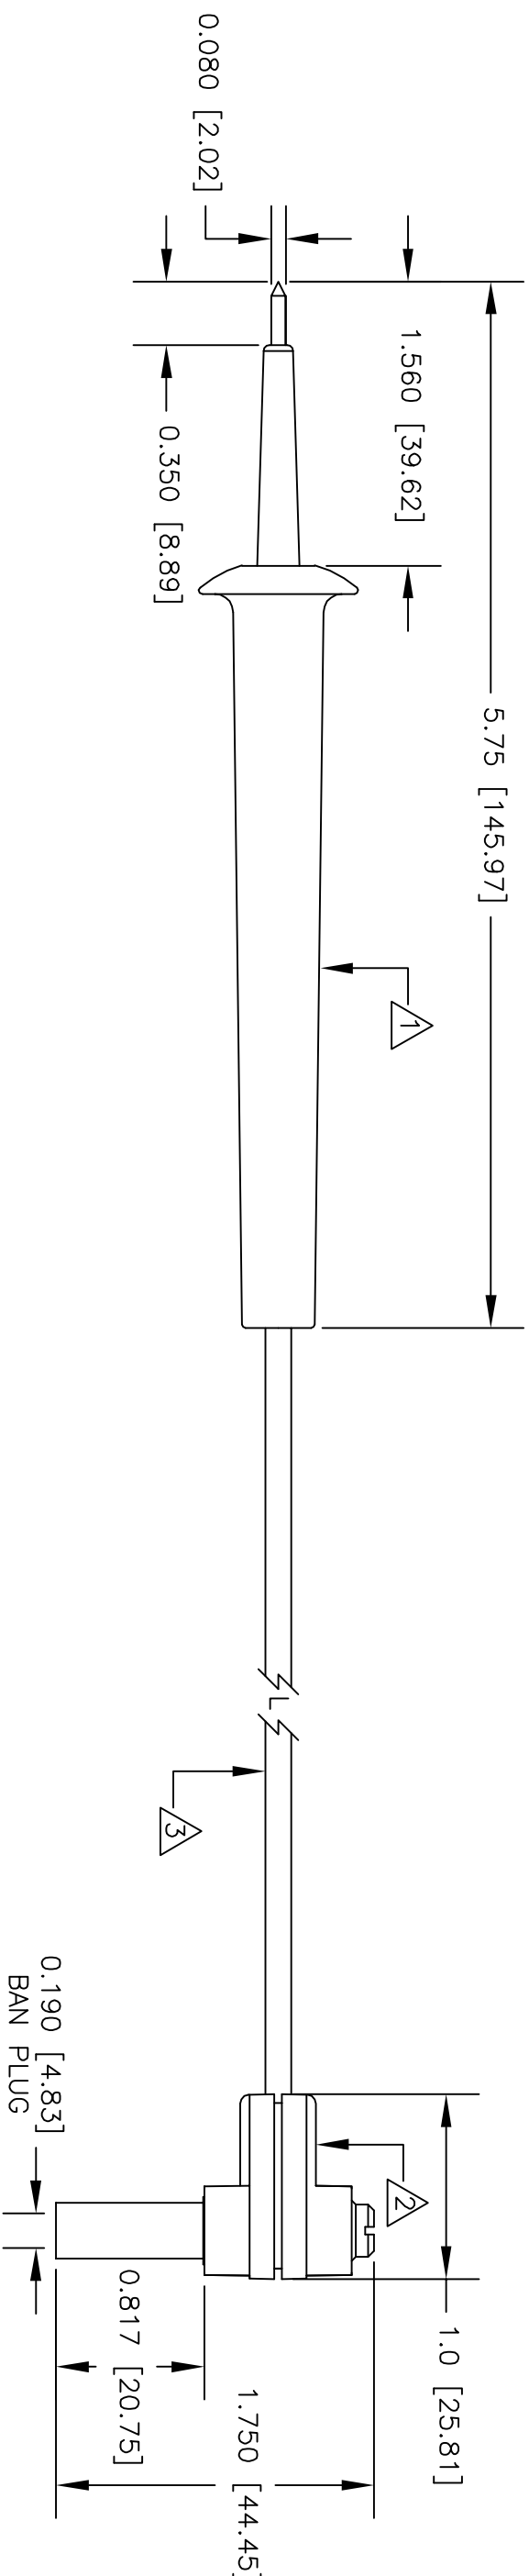

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.		<b>E-Z-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	DESCRIPTION PROBE (30) TO SHRD R/A STD BAN PLG (9302)
#	.XX #	#	APPROVALS		
MATERIAL SEE NOTE.		DRAWN R.L.		DATE 10/10	SIZE B
FINISH SEE NOTE.		APPROVED BY			CODE IDENT NO. 08505
APPLICATION USED ON		DO NOT SCALE DRAWING			DRAWING NO. 666
				SCALE 1:1	REV

LTR	DESCRIPTION	DATE	APPROVEI