


NOTES: UNLESS OTHERWISE SPECIFIED

- P/N: 300COLOR  
HOUSING: MOLDED NYLON 6 OR 6.6. AVAILABLE IN TEN COLORS.  
CONTACT TIP: STEEL. BRIGHT NICKEL FINISH.

- P/N: 9301COLOR  
HOUSING: MOLDED NYLON 6.6. AVAILABLE IN TEN COLORS.  
FRAME: BRASS. NICKEL PLATED.  
CONTACT: BeCu OR PHOSPHOR BRONZE. NICKEL PLATED.  
HARDWARE: BRASS EYELET. ZINC PLATED STEEL LOCK WASHER. COPPER, TIN PLATED TERMINAL RING.

- P/N: 9706COLOR  
20AWG 42X36 TINNED COPPER  
0.144 [3.66] O.D. PVC INSULATION  
AVAILABLE IN TEN COLORS.

- PERFORMANCE  
MAXIMUM CURRENT: 3 AMPS  
MAXIMUM VOLTAGE: 5000 W.V.D.C.  
MAXIMUM TEMPERATURE: 221°F (105°C)

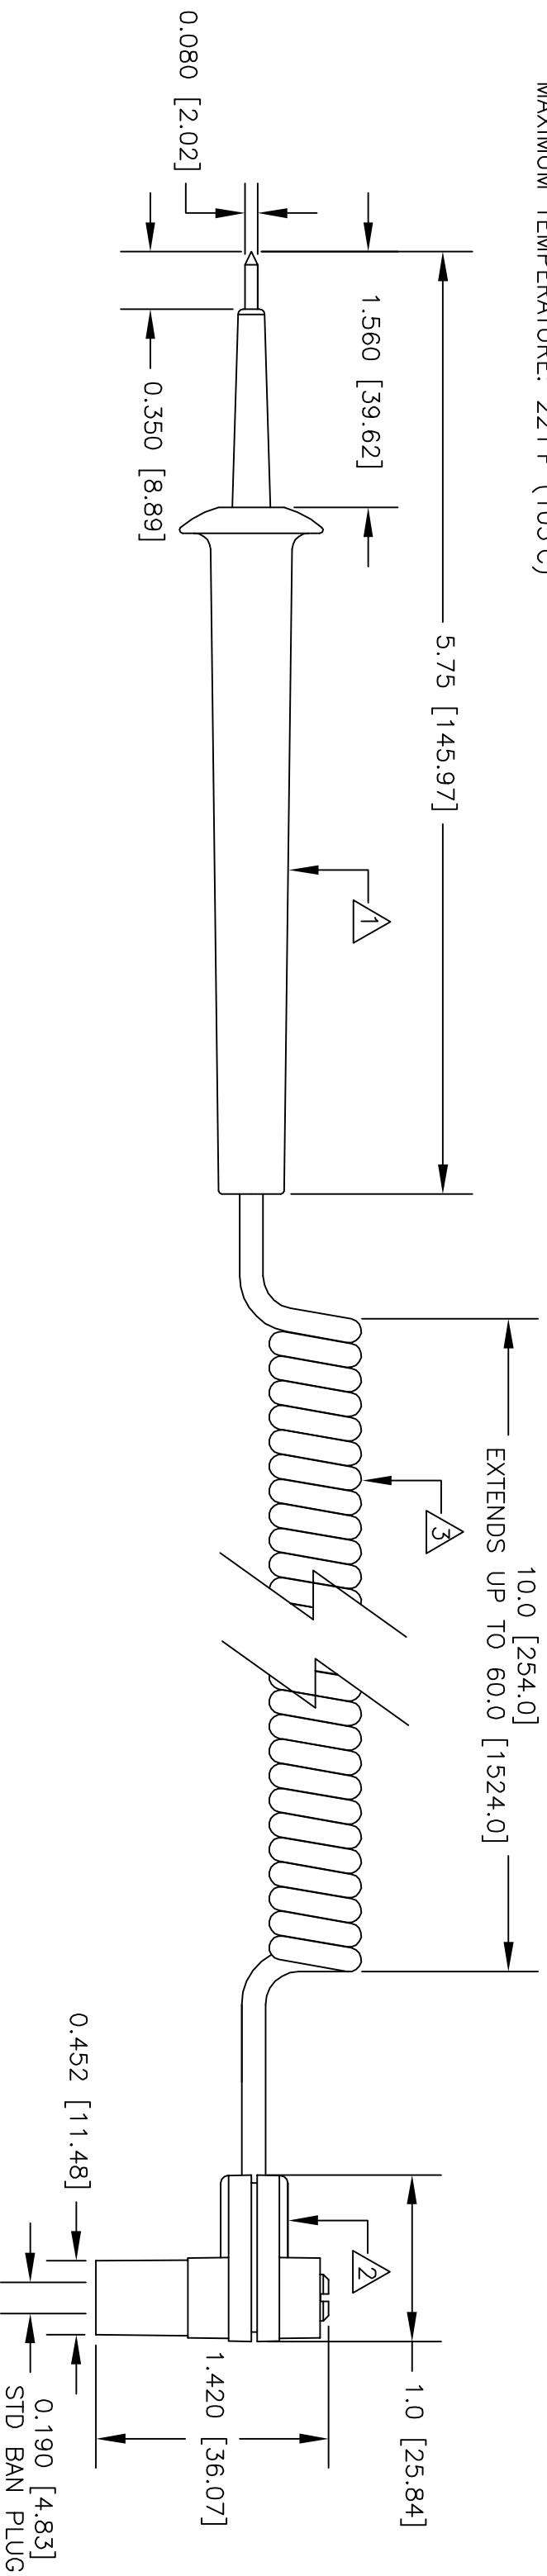

LTR	DESCRIPTION	DATE	APPROVEI

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.	
# .XX #	#	APPROVALS	DATE
#.XXX #	#	R.L.	9/12
MATERIAL		APPROVED BY	
SEE NOTE.			
FINISH			
SEE NOTE.			
APPLICATION	USED ON		
DO NOT SCALE DRAWING			
DESCRIPTION		SIZE	SCALE
E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.		CODE IDENT NO.	1:1
PROBE (30) TO SHRD		DRAWING NO.	
R/A STD BAN PLG (9301)			
REV			
NEXT ASSY			
USED ON			
SCALE			
B 08505			
667C			
SHEET 1 OF 1			

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.