


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 30CCOLOR
HOUSING: MOLDED NYLON 6 OR 6.6. AVAILABLE IN TEN COLORS.
CONTACT TIP: STEEL. BRIGHT NICKEL FINISH.

2. P/N: 9274CCOLOR
INSULATOR: MOLDED PVC. AVAILABLE IN TEN COLORS.
ALLIGATOR: STEEL. NICKEL PLATED.

3. P/N: 9706CCOLOR
20AWG 42X36 TINNED COPPER
0.144 [3.66] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.

4. PERFORMANCE
MAXIMUM CURRENT: 3 AMPS
MAXIMUM VOLTAGE: 5000 W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

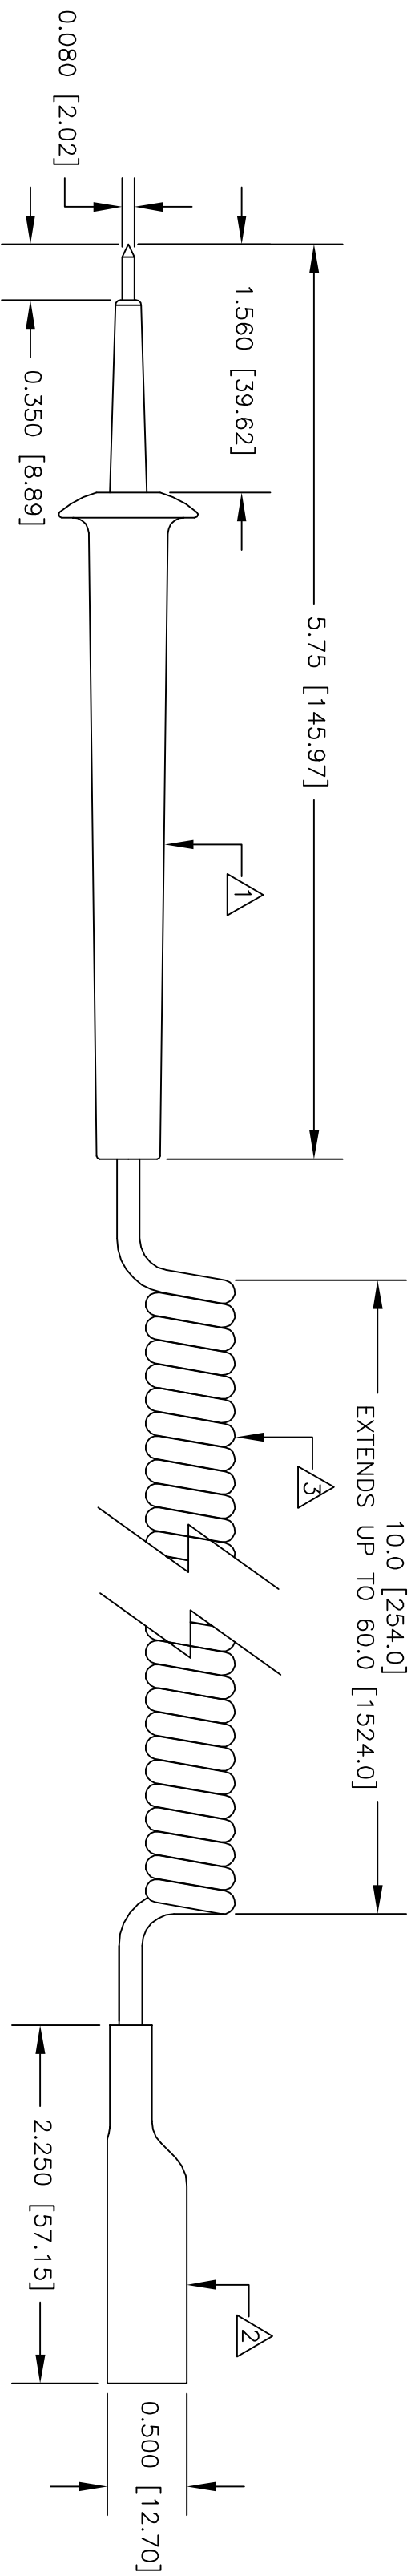

LTR	DESCRIPTION	DATE	APPROVEI

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.	
# .XX #	#	APPROVALS	DATE
#.XXX #	#	R.L.	9/12
MATERIAL		APPROVED BY	
SEE NOTE.			
FINISH			
SEE NOTE.			
NEXT ASSY	USED ON		
APPLICATION		DO NOT SCALE DRAWING	
E-Z-HOOK		DIVISION OF TEKTEST INC.	
ARCADIA, CA 91006 U.S.A.		DESCRIPTION	
PROBE (30) TO		STD ALLIGATOR CLIP (9274)	
SIZE	CODE IDENT NO.	DRAWING NO.	REV
B	08505	669C	
SCALE	1:1		SHEET 1 OF 1

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.