


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 300COLOR
HOUSING: MOLDED NYLON 6 OR 6.6. AVAILABLE IN TEN COLORS.
CONTACT TIP: STEEL. BRIGHT NICKEL FINISH.
2. P/N: 9274COLOR
INSULATOR: MOLDED PVC. AVAILABLE IN TEN COLORS.
ALLIGATOR: STEEL. NICKEL PLATED.
3. P/N: W-600/COLOR
18AWG 65X36 TINNED COPPER INSULATION
0.144 [3.66] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.
4. PERFORMANCE
MAXIMUM CURRENT: 4.0 AMPS
MAXIMUM VOLTAGE: 5000 W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

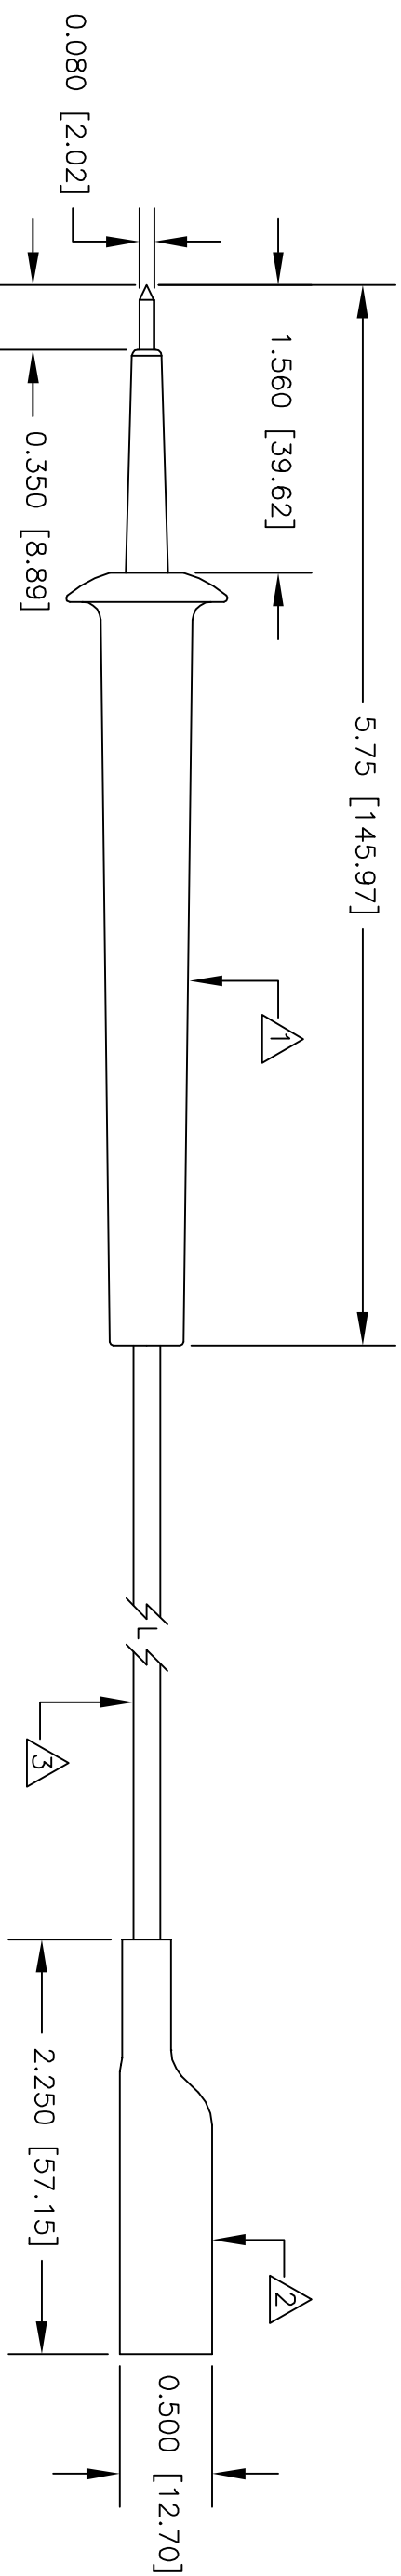

LTR	DESCRIPTION	DATE	APPROVEI

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.	
# .XX #	#	APPROVALS	DATE
# .XXX #	#	R.L.	11/10
MATERIAL		APPROVED BY	
SEE NOTE.			
FINISH			
SEE NOTE.			
NEXT ASSY			
USED ON			
APPLICATION		DO NOT SCALE DRAWING	

E-Z-HOOK
DIVISION OF TEKTEST INC.
ARCADIA, CA 91006 U.S.A.

DESCRIPTION
PROBE (30) TO
STD ALLIGATOR CLIP (9274)

SIZE CODE IDENT NO. DRAWING NO.
B 08505 669

SCALE 1:1 SHEET 1 OF 1