


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9274COLOR  
INSULATOR: MOLDED PVC. AVAILABLE IN TEN COLORS.  
ALLIGATOR: STEEL. NICKEL PLATED.
2. P/N: 9202COLOR  
HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.  
FRAME: BRASS. NICKEL PLATED.  
CONTACT: BeCu OR PHOSPHOR BRONZE. NICKEL PLATED.
3. P/N: W-600/COLOR  
18AWG 65X36 TINNED COPPER  
0.144 [3.66] O.D. PVC INSULATION  
AVAILABLE IN TEN COLORS.
4. PERFORMANCE  
MAXIMUM CURRENT: 4.0 AMPS  
MAXIMUM VOLTAGE: 5000 W.V.D.C.  
MAXIMUM TEMPERATURE: 221°F (105°C)

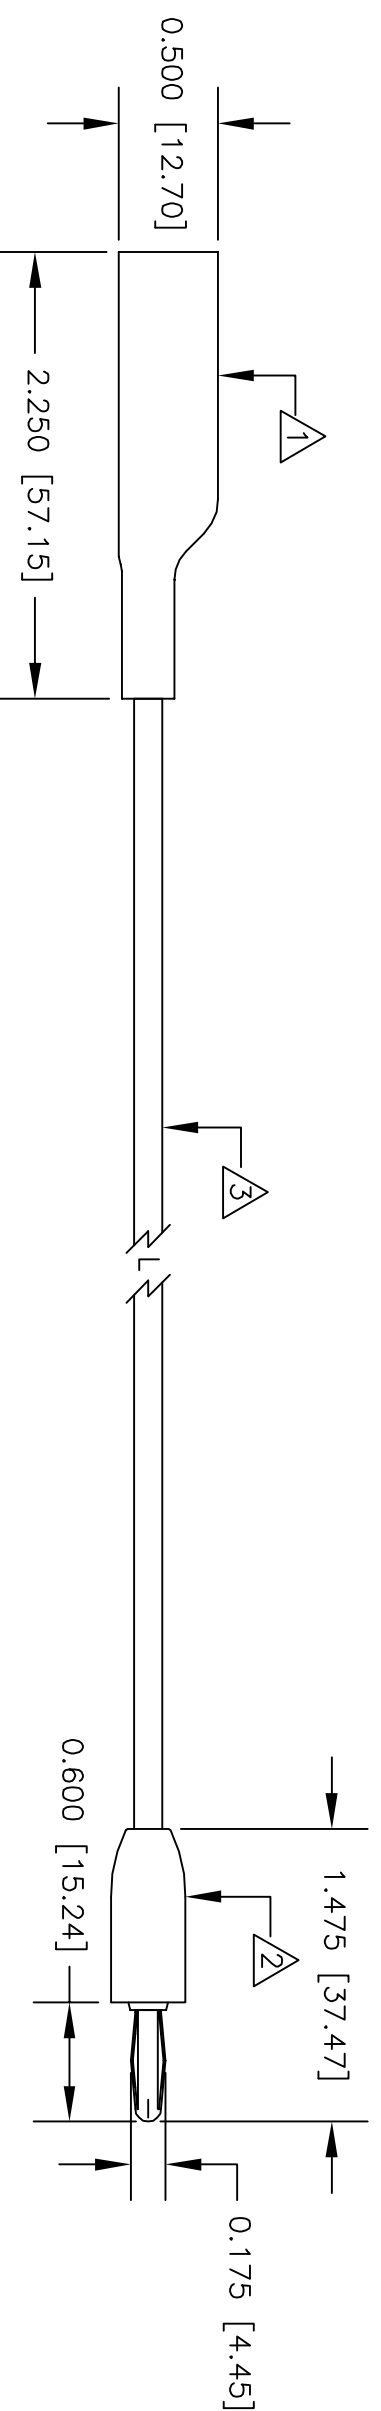

LTR	DESCRIPTION	DATE	APPROVEI

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES # .XX # # .XXX # #		CONTRACT NO.	
MATERIAL SEE NOTE.	FINISH SEE NOTE.	APPROVALS DRAWN R.L.	DATE 10/12
APPLICATION NEXT ASSY USED ON	DO NOT SCALE DRAWING	APPROVED BY	
DESCRIPTION STD ALLIGATOR CLIP (9274) TO STD BAN PLUG (9202)		SIZE B 08505	DRAWING NO. 680
SCALE 1:1		SHEET 1 OF 1	

**E-Z-HOOK**  
DIVISION OF TEKTEST INC.  
ARCADIA, CA 91006 U.S.A.