LTR	DESCRIPTION	DATE	APPROVEI

NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9306COLOR
   HOUSING: MOLDED NYLON 6,6. AVAILABLE IN BLK, RED & YEL.
   FRAME: BRASS. NICKEL PLATED.
   CONTACT: BeCu OR PHOSPHOR BRONZE. NICKEL PLATED.
   SOCKET: BRASS. NICKEL PLATED.
   HARDWARE: BRASS EYELET. COPPER, TIN PLATED TERMINAL RING.

2. P/N: 9302COLOR
   HOUSING: MOLDED NYLON 6,6. AVAILABLE IN TEN COLORS.
   FRAME: BRASS. NICKEL PLATED.
   CONTACT: BeCu OR PHOSPHOR BRONZE. NICKEL PLATED.
   HARDWARE: STAINLESS STEEL NUT. BRASS EYELET.
   COPPER, TIN PLATED TERMINAL RING.

3. P/N: W-600/COLOR
   18AWG 65X36 TINNED COPPER
   0.144 [3.66] O.D. PVC INSULATION
   AVAILABLE IN TEN COLORS.

4. PERFORMANCE
   MAXIMUM CURRENT: 4.0 AMPS
   MAXIMUM VOLTAGE: 5000 W.V.D.C.
   MAXIMUM TEMPERATURE: 221°F (105°C)

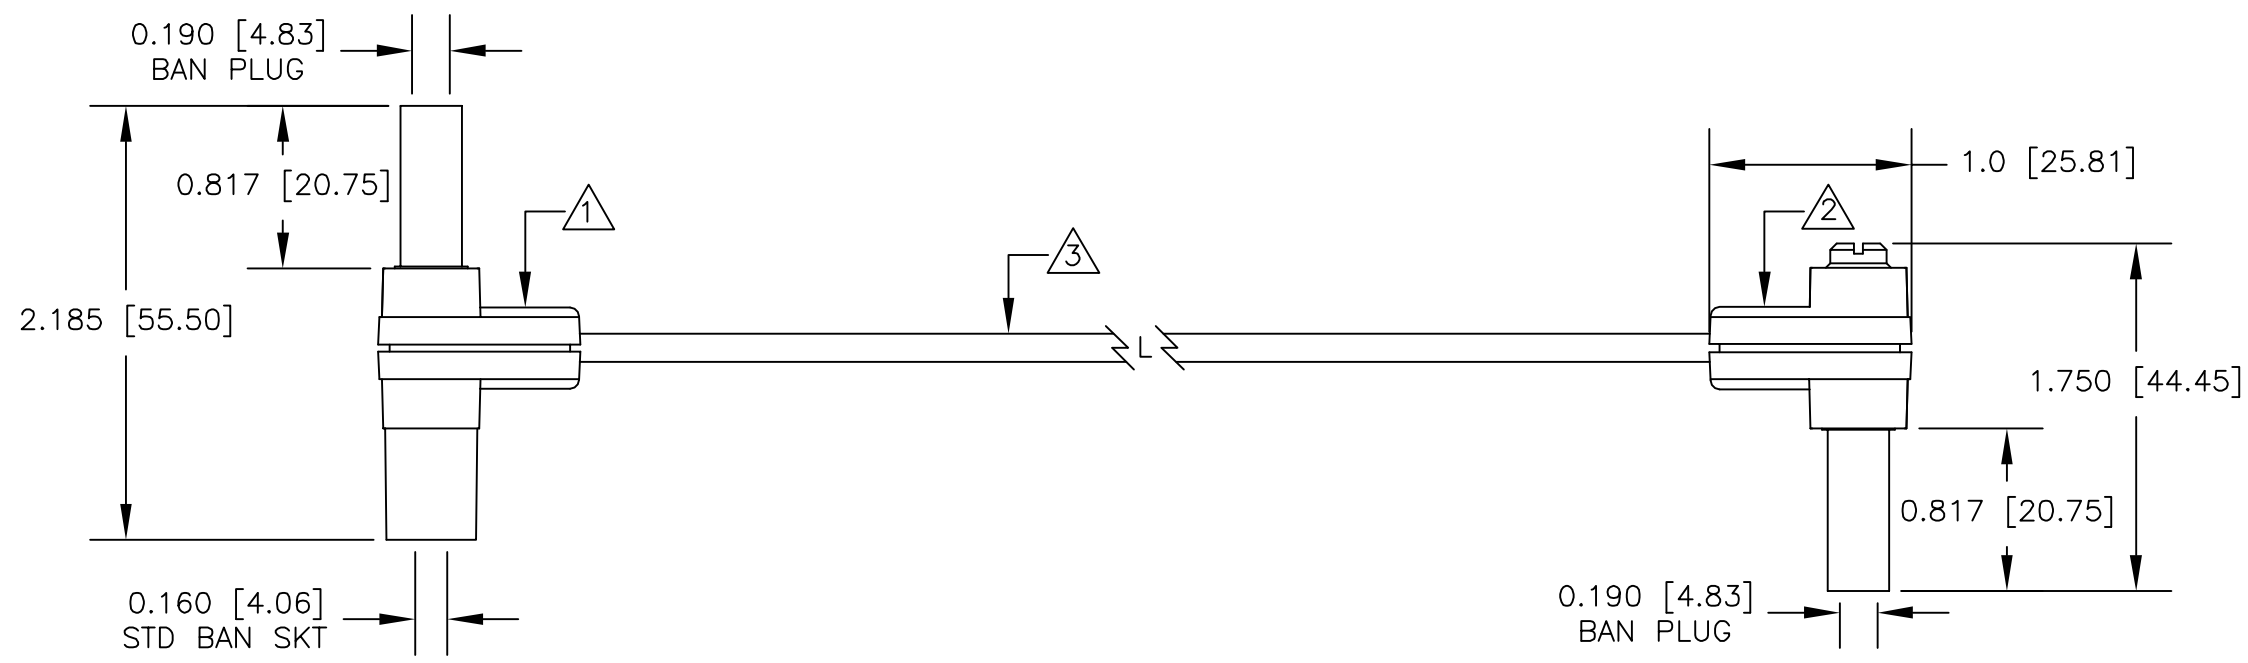

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS ± DECIMALS .XX ± .XXX ± ANGLES ±	CONTRACT NO.	E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			APPROVALS / DATE	
			DRAWN R.L. 11/12	DESCRIPTION
		MATERIAL SEE NOTE.	APPROVED BY	STK SHRD R/A STD BAN PLUG (9306) TO SHRD R/A STD BAN PLUG (9302)
		FINISH SEE NOTE.		SIZE B / CODE IDENT NO. 08505 / DRAWING NO. 9837 / REV
NEXT ASSY	USED ON			
APPLICATION		DO NOT SCALE DRAWING		SCALE 1:1 / SHEET 1 OF 1

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC.
MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.