


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 400COLOR  
HANDLE: ACRYLIC TUBING  
COVER: NYLON  
FRAME, TIP AND NUT: BRASS. NICKEL PLATED.

2. P/N: 9214COLOR  
HOUSING: MOLDED ACETAL. AVAILABLE IN BLACK OR RED.  
FRAME: BRASS. NICKEL PLATED.  
CONTACT: BeCu OR PHOSPHOR BRONZE. NICKEL PLATED.

3. P/N: W-600/COLOR  
18AWG 65X36 TINNED COPPER  
0.144 [3.66] O.D. PVC INSULATION  
AVAILABLE IN TEN COLORS.

4. PERFORMANCE  
MAXIMUM CURRENT: 4.0 AMPS  
MAXIMUM VOLTAGE: 5000 W.V.D.C.  
MAXIMUM TEMPERATURE: 221°F (105°C)

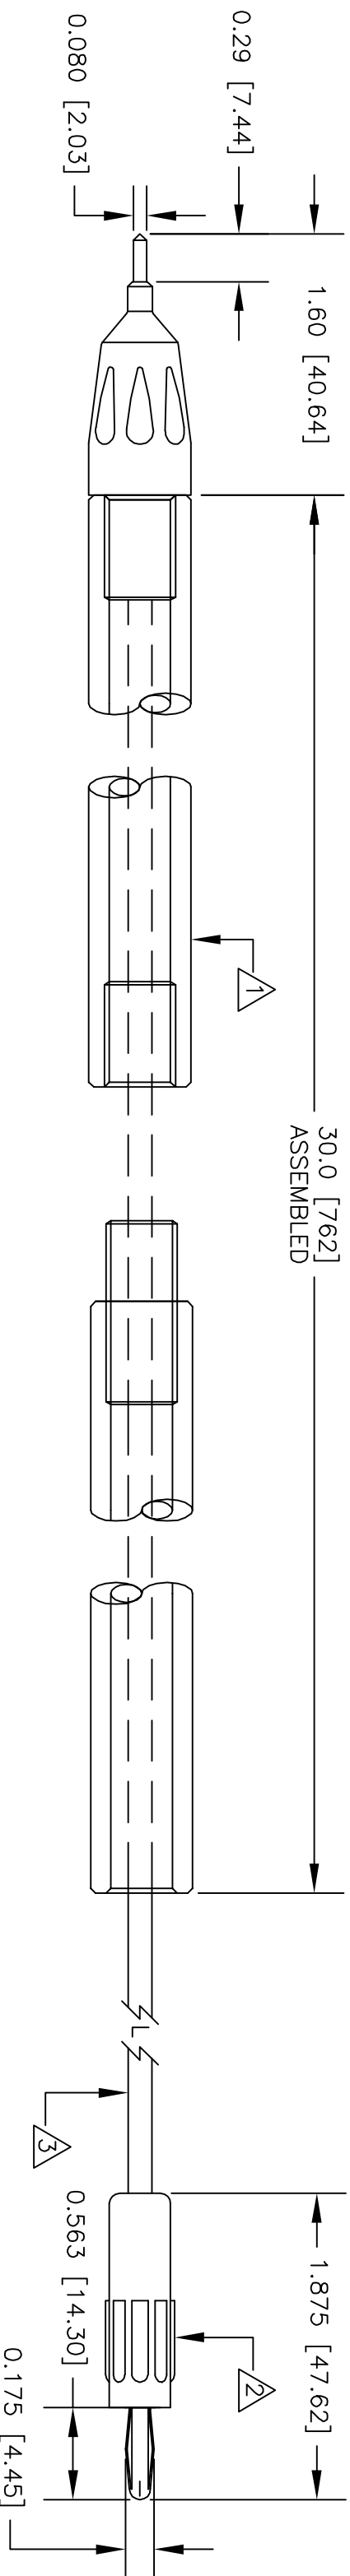

LTR	DESCRIPTION	DATE	APPROVEI

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES # .XX # # .XXX # #		CONTRACT NO.	
MATERIAL SEE NOTE.	APPROVALS	DATE	DESCRIPTION <b>E-Z-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
FINISH SEE NOTE.	DRAWN R.L.	10/12	
APPLICATION USED ON	APPROVED BY		PROBE (40) TO STD BAN PLUG (9214)
			SIZE CODE IDENT NO. DRAWING NO. B 08505 BX640
			SCALE 1:1
			SHEET 1 OF 1
			REV

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.