| LTR | DESCRIPTION | DATE | APPROVEI |
|---|---|---|---|
| | | | |

NOTES: UNLESS OTHERWISE SPECIFIED

1. CONSTRUCTION:
   THUMB SCREW & INSULATOR: MOLDED NYLON. AVAILABLE IN BLACK OR RED.
   FRAME: NICKEL PLATED BRASS FRAME.

2. PERFORMANCE:
   MAXIMUM CURRENT: XX
   MAXIMUM VOLTAGE: XX
   MAXIMUM TEMPERATURE: XX

3. FEATURES:
   ACCEPTS SHROUDED AND STANDARD BANANA PLUGS.
   FOR PANEL THICKNESS 0.62 [1.58] TO 0.250 [6.35].

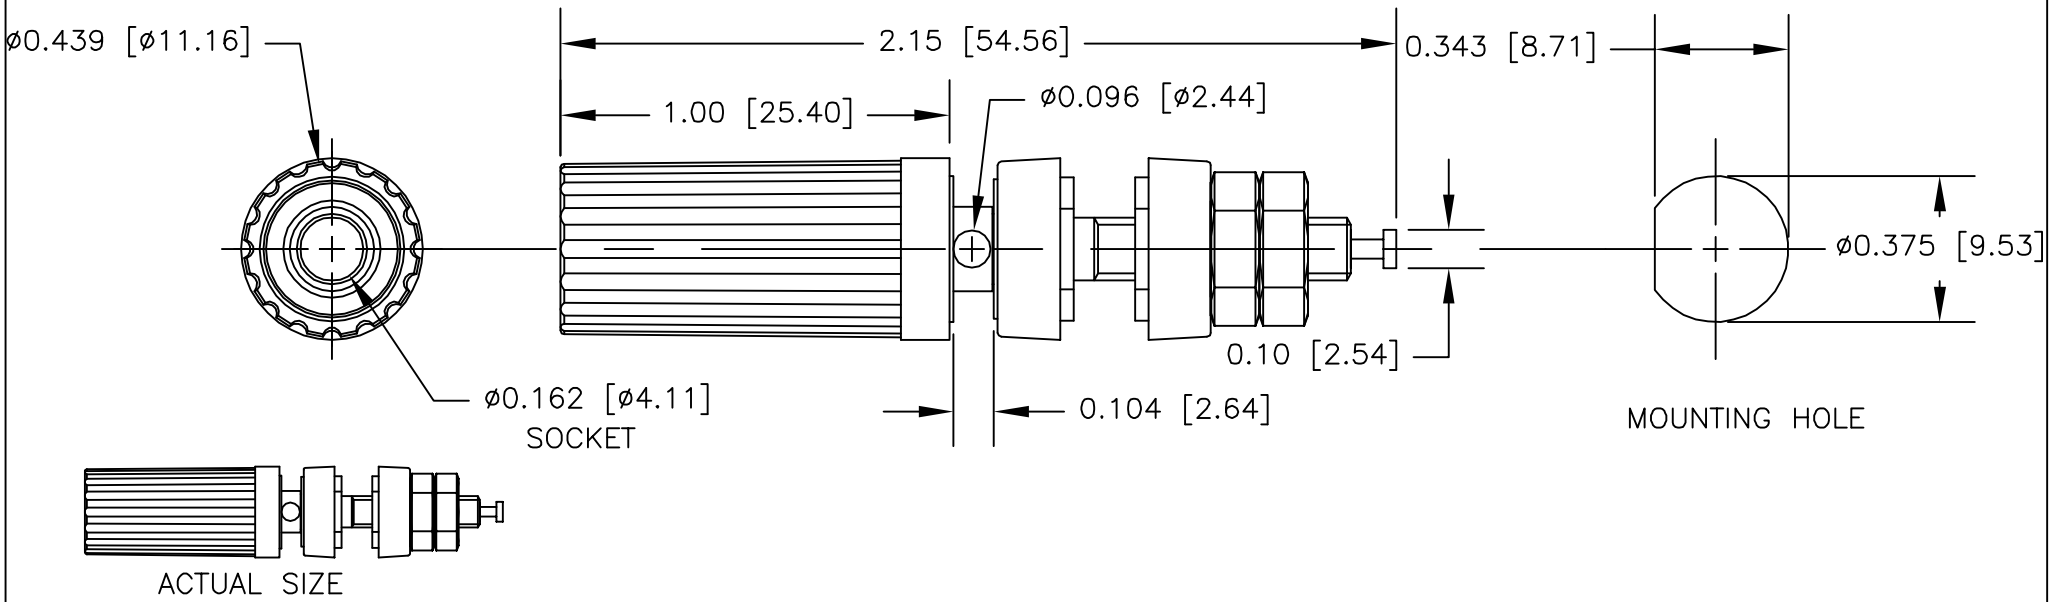


| | | | | |
|---|---|---|---|---|
| | | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS ± DECIMALS .XX ± .XXX ± ANGLES ± | CONTRACT NO. | E-Z-HOOK® DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A. |
| | | | APPROVALS / DATE | |
| | | | DRAWN R.L. 3/09 | DESCRIPTION SHROUDED OR STD BAN PLUG BINDING POST |
| | | MATERIAL SEE NOTE. | APPROVED BY | |
| | | FINISH SEE NOTE. | | SIZE A / CODE IDENT NO. 08505 / DRAWING NO. 9282 / REV |
| NEXT ASSY | USED ON | | | |
| APPLICATION | | DO NOT SCALE DRAWING | | SCALE 2:1 / SHEET 1 OF 1 |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC.
MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.